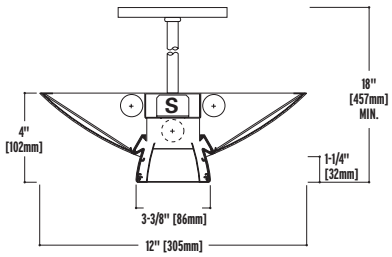

Construction: Extruded aluminum housing, 20-gauge steel side shields with staggered round hole pattern backed by white acrylic diffuser. Nominal 3', 4', 6' or 8' illuminated sections.

End Plates: Die-formed aluminum.

Shielding: Parabolic, Semi-Specular Aluminum.

Electrical: 120, 277, 347 or Universal Voltage electronic ballast. Fixtures and electrical components certified to UL and CUL standards.

Finish: Durable, low gloss, white, powder coated acrylic finish.

Mounting: Pendant: Single stem (standard); single cable. Canopy: 5" diameter cover (standard).

ORDERING INFORMATION:
Sample number: 16-DIP-3T5-SC35-2EB-DU-RP

Series
16=Europa

Light Output
DIP=Direct-Indirect Pendant
IP=Indirect Pendant (2 lamps only)

Number of Lamps (per cross section) (not included)
3=3 Lamps

Lamp Type
T8 **T5** **T5HO**

Pendant Type
ST=Single Stem [2] **SC**=Single Cable

Run Length
Overall Nominal Run Length__ft. (Any combination of 8', 6', 4' and 3' sections)

Voltage [1]
1=120V **2**=277V **3**=347V **U**=Universal

Ballast
EB=Electronic Ballast (Standard) **DB**=Dimming Ballast
[Only slim line ballast (small case)]

Switching
SI=Single Switching **DU**=Dual Switching

Perforation
RP=Round **BP**=None **SP**=Slotted

Emergency
EM=Emergency Pack (Consult Factory)

Fusing
GLR **GMF**

1 Due to various constraints, some options may not be combined with others.
2 Available with 7° or earthquake 45° swivel canopy assembly.

S = Slim Line Ballast only.



EUROPA
16-DIP
16-IP

INDIRECT-DIRECT

- Indirect - direct light distribution.
- T5 and T8 lamping options.
- Three distinct light distributions - direct, indirect and direct-indirect (specify dual switching).
- Die formed steel perforated housings.
- Dual aircraft cable hangers for superior leveling.
- Nominal 3', 4', 5', 6' or 8' long illuminated sections.
- Articulated joiners between sections.
- Optional slotted perforated pattern.
- Precision die cast end caps.

ROW CONFIGURATION

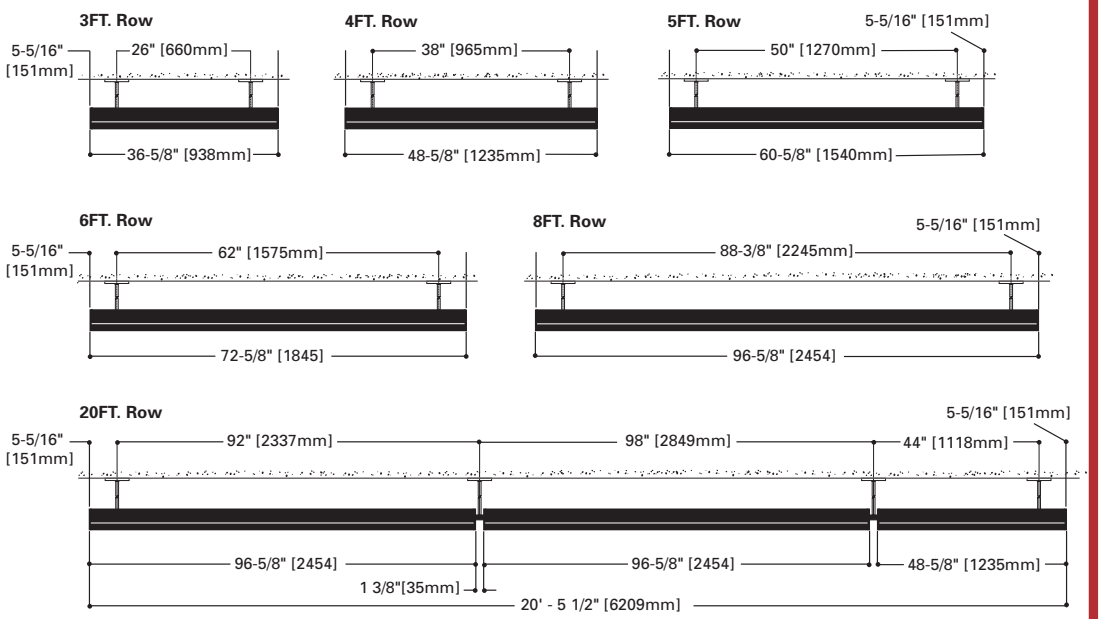

NOTES: For complete product data, refer to the Neo-Ray Specification Binder. Specifications and dimensions subject to change without notice. Products may be modified for use in international markets. Please contact your Cooper Lighting Sales Representative for availability and ordering information.